

Listing of Claims

1. (Currently Amended) An organic electroluminescent device, comprising:
a substrate;
a first electrode formed on the substrate;
an emission layer formed over the first electrode, the emission layer comprising
and having a first emission area layer for a first color emission, a second emission area layer for a
second color emission, and a third emission area layer for a third color emission;
a hole blocking layer ~~formed on the emission layer, the hole blocking layer being~~
formed of the same substance as that of the third emission ~~area layer~~; and
a second electrode formed over the hole blocking layer, wherein the hole blocking
layer is formed between the first, second, and third emission layers and the second electrode.
2. (Currently Amended) The device according to claim 1, ~~wherein~~ further
comprising:
a hole injection layer and a hole transport layer ~~are sequentially formed~~ between
the first electrode and the emission layer.
3. (Currently Amended) The device according to claim 1, ~~wherein~~ further
comprising:

at least one of an electron transport layer or ~~and~~ an electron injection layer is formed between the hole blocking layer and the second electrode.


4. (Currently Amended) The device according to claim 1, wherein the first emission ~~area~~ layer is a green emission ~~area~~ layer, the second emission ~~area~~ layer is a red emission ~~area~~ layer, and the third emission ~~area~~ layer is a blue emission ~~area~~ layer.

5. (Currently Amended) The device according to claim 1, wherein at least one of the first emission ~~area~~ and layer or the second emission ~~area~~ layer is formed of a phosphorescent substance, and the third emission layer is formed of a fluorescent substance.


6. (Currently Amended) The device according to claim 1, wherein the third emission layer is formed from a plurality of substances and wherein the hole blocking layer is formed from ~~of any~~ one of the ~~[[a]]~~ plurality of substances forming the third emission ~~area~~ layer.

7. (Original) The device according to claim 1, wherein the hole blocking layer is formed of any one of a plurality of substances listed below:


B-1




B-2




B-3




B-4




B-5

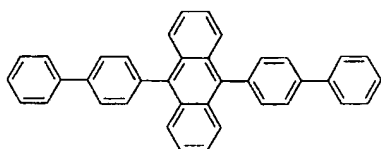


B-6

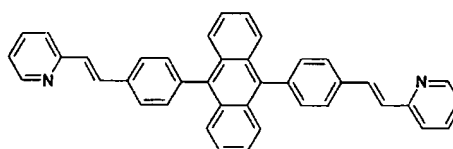


B-7

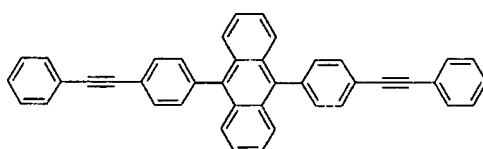


B-8

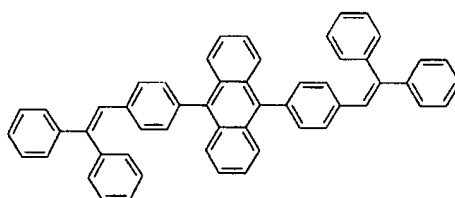


B-9




B-10














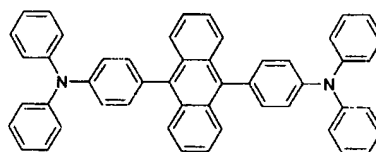















B-11







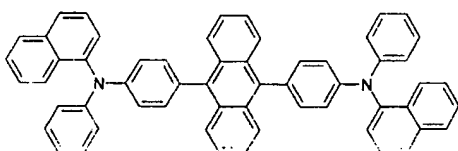









B-12

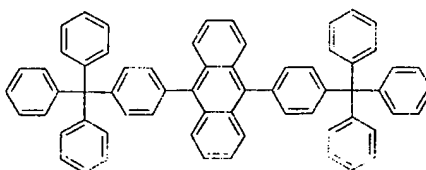

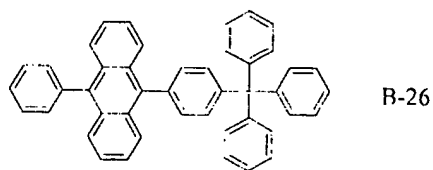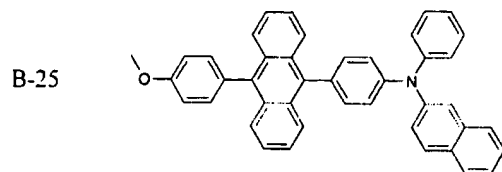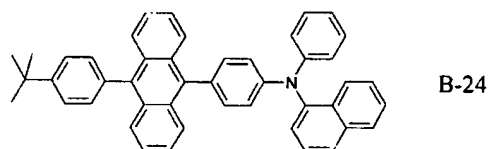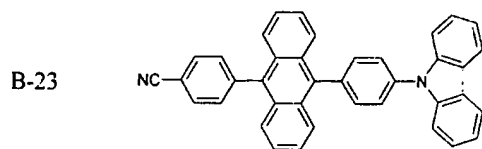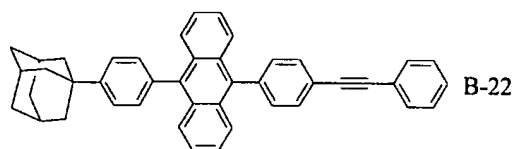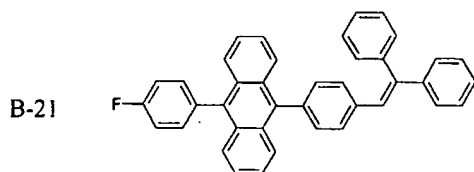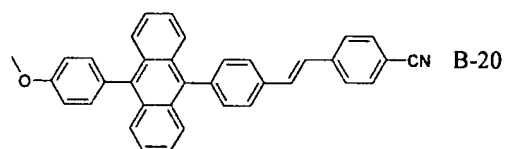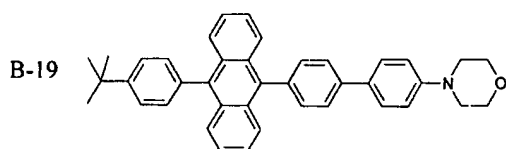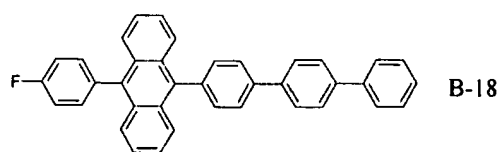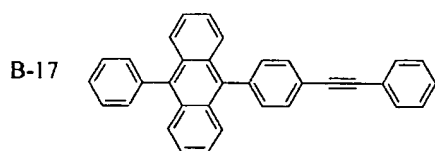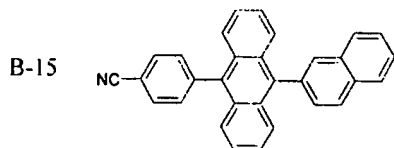

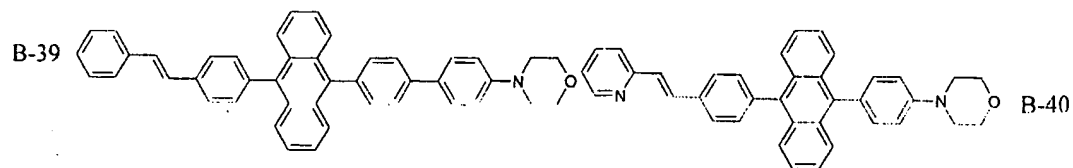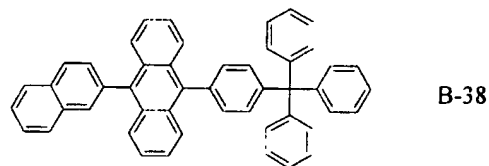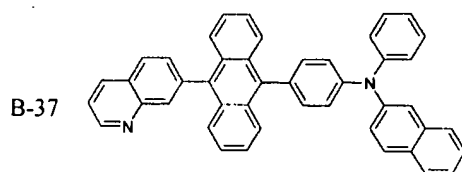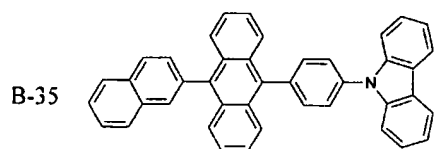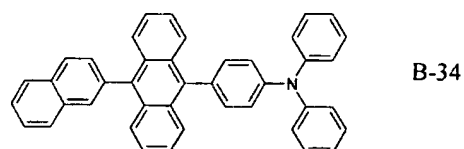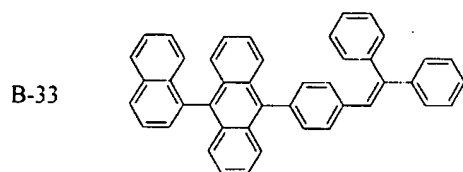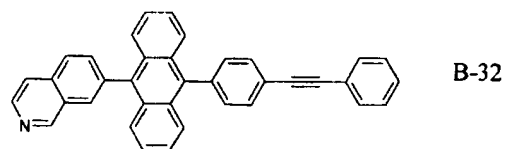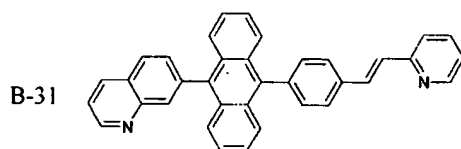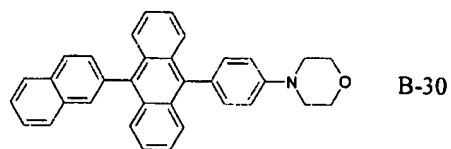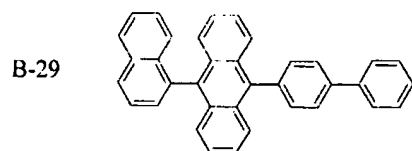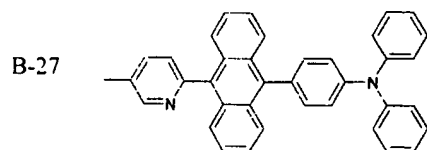

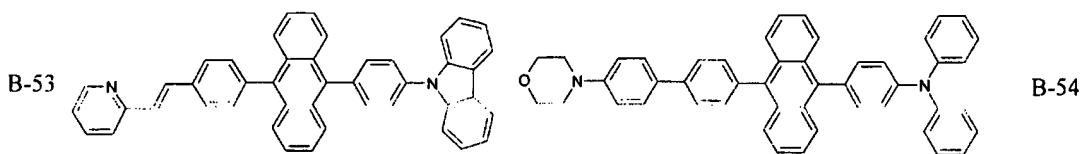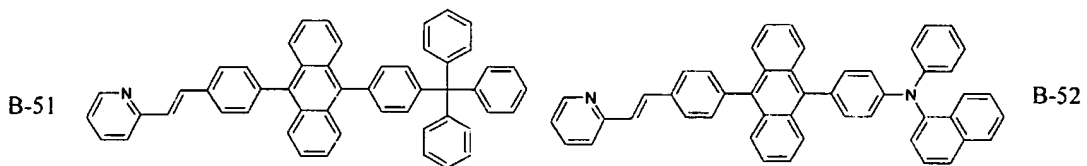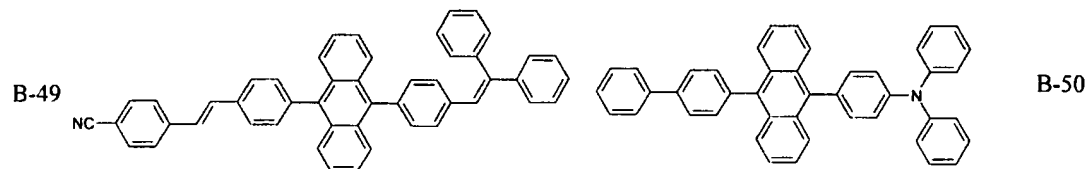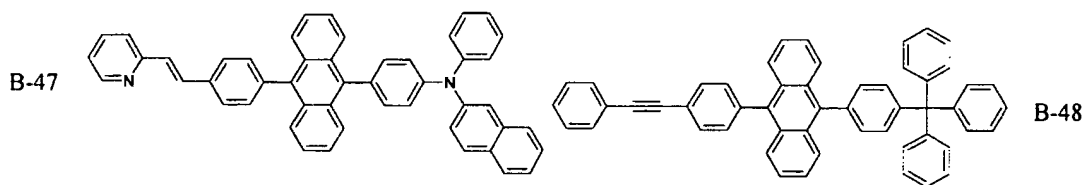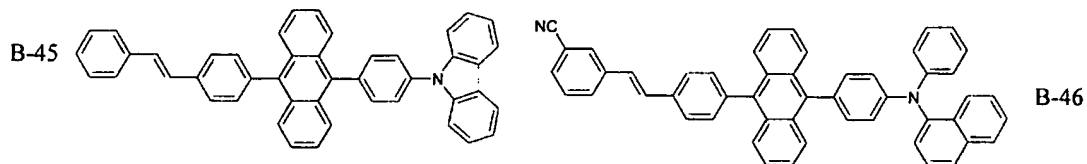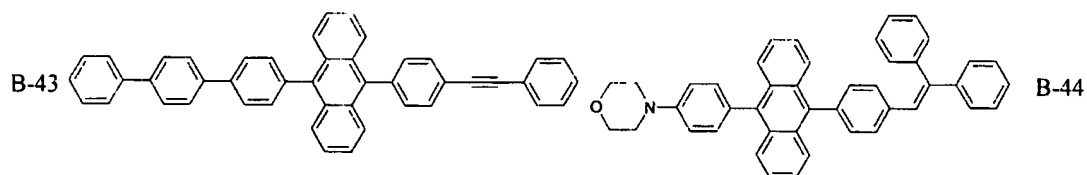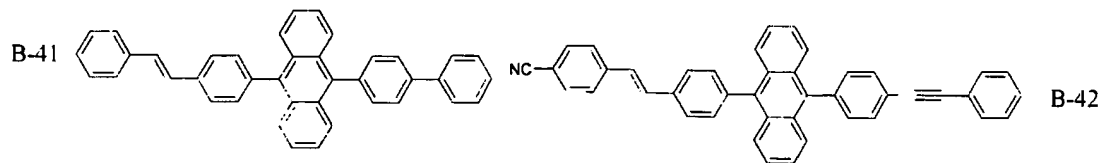

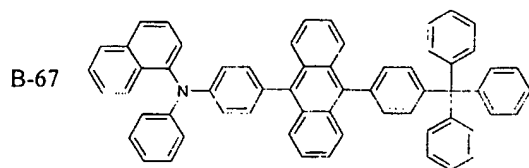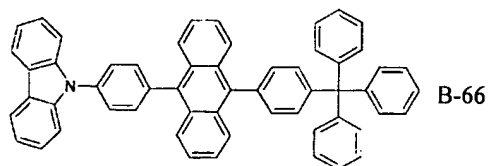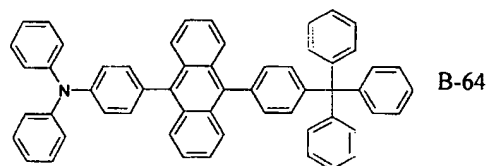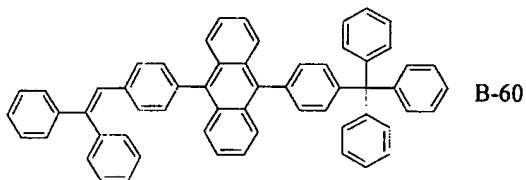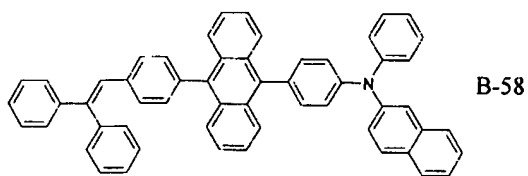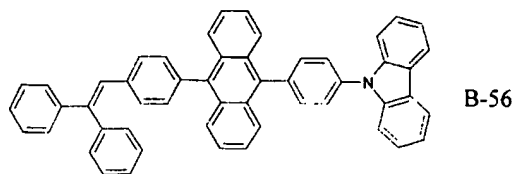

8. (Currently Amended) A method for fabricating an organic electroluminescent device, comprising:

forming a first electrode on a substrate;

forming a first emission layer for in a first emission area color emission over the first electrode;

forming a second emission layer for in a second emission area color emission over the first electrode;

forming a third emission layer for in a third emission area color emission over the first electrode, ~~and subsequently;~~

forming a hole blocking layer ~~on the first, second, and third emission layers by~~ using a substance of the third emission layer; and

forming a second electrode over the hole injection layer, wherein the hole blocking layer is formed between the first, second, and third emission layers and the second electrode.

9. (Currently Amended) The method according to claim 8, further comprising:

sequentially forming a hole injection layer and a hole transport layer between the first electrode and the first, second, and third emission layers.

10. (Currently Amended) The method according to claim 8, further comprising:
forming at least one of an electron transport layer ~~or~~ ~~and~~ an electron injection layer between the hole blocking layer and the second electrode.

11. (Currently Amended) The method according to claim 8, wherein the first emission ~~area~~ layer is a green emission ~~area~~ layer, the second emission ~~area~~ layer is a red emission ~~area~~ layer, and the third emission ~~area~~ layer is a blue emission ~~area~~ layer.

12. (Currently Amended) The method according to claim 8, wherein at least one of the first emission ~~area~~ layer ~~or~~ ~~and~~ the second emission ~~area~~ layer is formed of a phosphorescent substance, and the third emission layer is formed of a fluorescent substance.

13. (Currently Amended) The method according to claim 8, wherein the third emission layer is formed from a plurality of substances and wherein the hole blocking layer is formed from ~~of any~~ one of the ~~the~~ ^{[[a]]} plurality of substances forming the third emission ~~area~~ layer.

14. (New) The device according to claim 1, wherein the hole blocking layer is formed directly on the first, second, and third emission layers.

15. (New) The device according to claim 1, wherein the hole blocking layer is formed from B-60.

16. (New) The device according to claim 1, wherein the hole blocking layer is formed from Balq.

17. (New) The method according to claim 8, wherein the hole blocking layer is formed directly on the first, second, and third emission layers.

18. (New) The method according to claim 8, wherein the hole blocking layer is formed from B-60.

19. (New) The method according to claim 8, wherein the hole blocking layer is formed from Balq.